








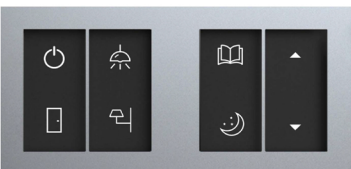




CG600 WIRELESS PANEL

Model No.	Image	Description	Features	Specificaton
CG600S1		<u>One gang switch</u>	1. 1 gang switch panel 2. Two-way control function: Support 3. Button Icon customization: Support 4. Maximum capacity loading : 2000W 5. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600S2		<u>Two gang switch</u>	1. 2 gang switch panel 2. Two-way control function: Support 3. Scene control support: 4 4. Button Icon customization: Support 5. Maximum capacity loading : 2000W 6. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600S4		<u>Four gang switch</u>	1. 4 gang switch panel 2. Two-way control function: Support 3. Scene control support: 4 4. Button Icon customization: Support 5. Maximum capacity loading : 2000W 6. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600DM		<u>One gang dimmer</u>	1. 1 gang dimmer panel 2. Two-way control function: Support 3. Button Icon customization: Support 4. Maximum capacity loading : 2000W 5. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600S2-CCP		<u>One gang curtain switch</u>	1. 1 gang curtain control panel 2. Two-way control function: Support 3. Button Icon customization: Support 4. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600S4-CCP		<u>Two gang curtain switch</u>	1. 2 gang curtain control panel 2. Two-way control function: Support 3. Button Icon customization: Support 4. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600K2		<u>Four scene switch</u>	1. 4 scene control panel 2. Two-way control function: Support 3. Scene control support: 4 4. Button Icon customization: Support 5. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600K4		<u>Eight scene switch</u>	1. 8 scene control panel 2. Two-way control function: Support 3. Scene control support: 8 4. Button Icon customization: Support 5. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600TH		<u>Thermostat</u>	1. Thermostat panel (ON/OFF/ FAN SPEED/ TEMPERATURE) 2. Button Icon customization: Support 3. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 86mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600S4S4		<u>Eight gang switch</u>	1. 8 gang switch panel 2. Two-way control function: Support 3. Scene control support: 8 4. Button Icon customization: Support 5. Maximum capacity loading : 2000W x 2 6. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 172mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600S4TH		<u>Four gang switch with thermostat</u>	1. 4 gang switch panel with thermostat panel (ON/OFF/ FAN SPEED/ TEMPERATURE) 2. Two-way control function: Support 3. Scene control support: 4 4. Button Icon customization: Support 5. Maximum capacity loading : 2000W x 2 6. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 172mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal
CG600K4TH		<u>Eight scene switch with thermostat</u>	1. 8 scene switch panel with thermostat panel (ON/OFF/ FAN SPEED/ TEMPERATURE) 2. Two-way control function: Support 3. Scene control support: 8 4. Button Icon customization: Support 5. Backlight: Support	Operating voltage: AC100-240V, 50/60Hz Dimensions: 86mm(H) x 172mm(W) x 40.5mm(D) Control communications: ZigBee, IEEE 802.15.4 , MESH Network Radio frequency: 2.4 GHz, 15 channels Frame: Metal