
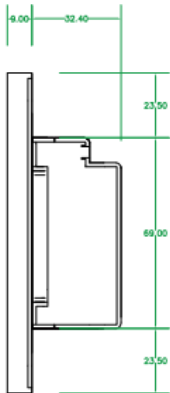
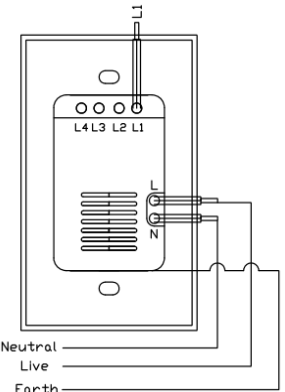


Model: CG630DM

Product: One gang dimmer

		<p><b>Specifications</b></p> <p>Two-way control function: Support</p> <p>Operating voltage: AC100-240V, 50/60Hz</p> <p>Dimension L X W x D (mm) 116x70x41.4</p> <p>Backlight: Support</p> <p>Adjustable Min. / Max. dimming level Support</p> <p>Adjustable dimming step time Support</p> <p>Control communications: ZigBee, IEEE 802.15.4 , MESH Network</p> <p>Radio frequency: 2.4 GHz, 16 channels</p> <p>Operational temperature 0°C to 40°C</p> <p>Humidity 5% to 95% non-condensing</p> <p>Storage -20°C to 70°C</p>	
<p><b>Wiring Diagram:</b></p> 		<p><b>Specifications – Loads</b></p> <p><b>Maximum Load ( Per Unit )</b> <b>300W</b></p> <p>Resistive load (Per Gang)</p> <ol style="list-style-type: none"> <li>1. Incandescent</li> <li>2. Halogen Electronic low voltage – ELV transformer</li> </ol> <p><b>Inductive load (Per Gang)</b></p> <ol style="list-style-type: none"> <li>1. Magnetic low voltage – MLV transformer.</li> <li>2. Iron core / Inductive transformer</li> </ol> <p><b>Fluorescent (Per Gang)</b> N/A</p> <p><b>Compact fluorescent - CFL (Per Gang)</b> 200W Dimmable CFL Max. 20pcs CFL **</p> <p><b>LED – GU10 (Per Gang)</b> 60W</p> <p><b>LED – MR16, MR11 (Per Gang)</b> 120W With electronic low voltage LED driver</p> <p><b>LED strip (Per Gang)</b> N/A With electronic low voltage driver</p> <p><b>Exhaust fan (Per Gang)</b> N/A</p>	

\*\*Remarks:

1. The maximum load requirements for fluorescent, CFL and LED loads may vary depends on the specific fixture and /or bulb being used.

2. The Unit must be earthed

TECHNICAL INFORMATION AND PICTURES ARE SUBJECTED TO CHANGE WITHOUT PRIOR NOTICE.

Copyright © CityGrow Energy Systems Limited. All Rights Reserved.