
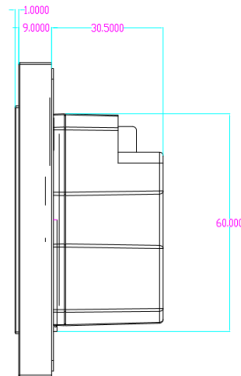



Model: CG600K4

Product: 8 Scene Panel

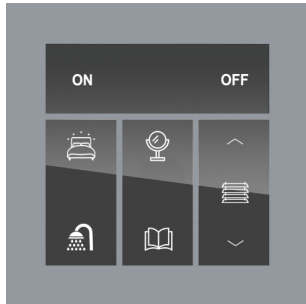

Specifications	
Two-way control function:	Support
Operating voltage:	AC100-240V, 50/60Hz
Dimension L X W x D (mm)	86x86x40.5
Backlight:	Support
Control communications:	ZigBee, IEEE 802.15.4 , MESH Network
Radio frequency:	2.4 GHz, 16 channels
Operational temperature	0°C to 40°C
Humidity	5% to 95% non-condensing
Storage	-20°C to 70°C
Features	
1. 8 Scene control	

Wiring Diagram:

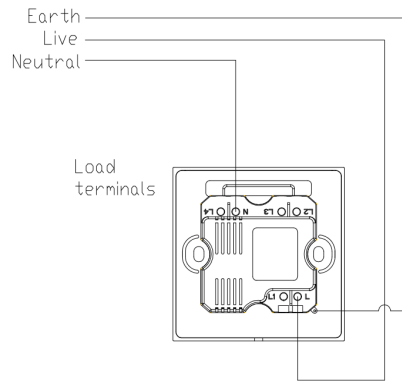

****Remarks:**

1. The maximum load requirements for fluorescent, CFL and LED loads may vary depends on the specific fixture and /or bulb being used.
2. The Unit must be earthed

TECHNICAL INFORMATION AND PICTURES ARE SUBJECTED TO CHANGE WITHOUT PRIOR NOTICE.
 Copyright © CityGrow Energy Systems Limited. All Rights Reserved.