

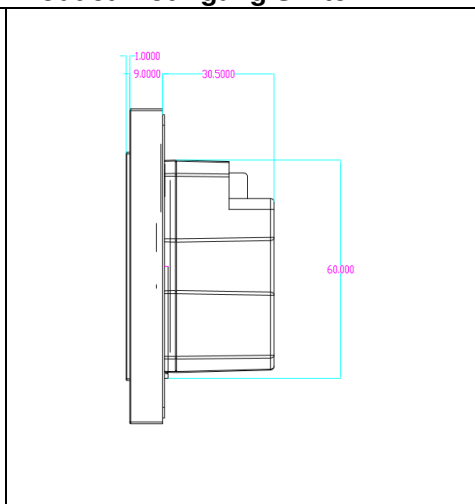


Model: CG600S4

Product: Four gang Switch

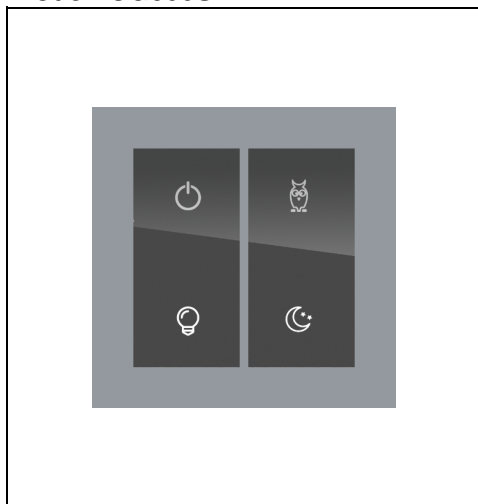

| <b>Specifications</b>            |                                      |
|----------------------------------|--------------------------------------|
| Two-way control function:        | Support                              |
| Operating voltage:               | AC100-240V, 50/60Hz                  |
| Dimension L X W x D (mm)         | 86x86x40.5                           |
| Backlight:                       | Support                              |
| Control communications:          | ZigBee, IEEE 802.15.4 , MESH Network |
| Radio frequency:                 | 2.4 GHz, 16 channels                 |
| Operational temperature          | 0°C to 40°C                          |
| Humidity                         | 5% to 95% non-condensing             |
| Storage                          | -20°C to 70°C                        |
| <b>Specifications – Loads</b>    |                                      |
| <b>Maximum Load ( Per Unit )</b> | <b>2000W</b>                         |

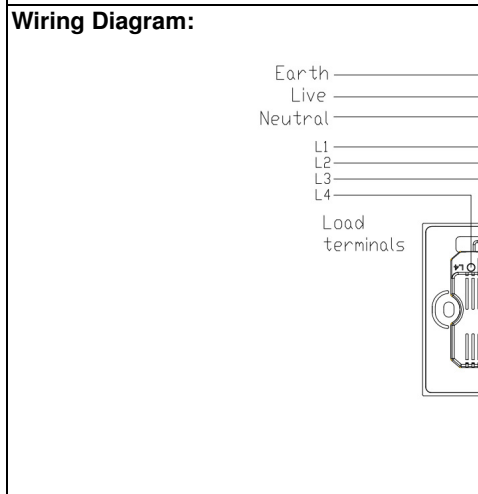

|   |                              |
|---|------------------------------|
| <b>Resistive load (Per Gang)</b>                    |                              |
| 1. Incandescent                                     | 2000W                        |
| 2. Halogen Electronic low voltage – ELV transformer |                              |
| <b>Inductive load (Per Gang)</b>                    |                              |
| 1. Magnetic low voltage – MLV transformer.          | 2000VA                       |
| 2. Iron core / Inductive transformer                |                              |
| <b>Fluorescent (Per Gang)</b>                       | 1400W                        |
| <b>Compact fluorescent - CFL (Per Gang)</b>         | 400W<br>Max. 24 pcs CFL**    |
| <b>LED – GU10 (Per Gang)</b>                        | 200W                         |
| <b>LED – MR16, MR11 (Per Gang)</b>                  | 400W                         |
| With electronic low voltage LED driver              | Max. 24 pcs ELV LED driver   |
| <b>LED strip (Per Gang)</b>                         | 400W                         |
| With electronic low voltage driver                  | Max. 10 pcs ELV LED driver** |
| <b>Exhaust fan (Per Gang)</b>                       | 300VA                        |

\*\*Remarks:

1. The maximum load requirements for fluorescent, CFL and LED loads may vary depends on the specific fixture and /or bulb being used.

2. The Unit must be earthed

TECHNICAL INFORMATION AND PICTURES ARE SUBJECTED TO CHANGE WITHOUT PRIOR NOTICE.

Copyright © CityGrow Energy Systems Limited. All Rights Reserved.