

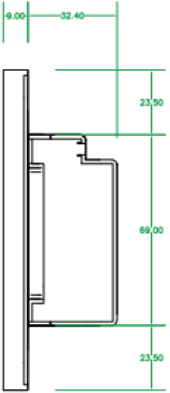


Model: CG630S4-CCP

Product: Two gang curtain control switch

		Specifications	
		Two-way control function:	Support
		Operating voltage:	AC100-240V, 50/60Hz
		Dimension L X W x D (mm)	116x70x41.4
		Backlight:	Support
		Minimum / Max dimming level setting	ZigBee, IEEE 802.15.4 , MESH Network
		Dimming step time	2.4 GHz, 16 channels
		Control communications:	0°C to 40°C
		Radio frequency:	5% to 95% non-condensing
		Operational temperature	-20°C to 70°C
		Specifications – Loads	
		3 wire type AC curtain motor	300VA

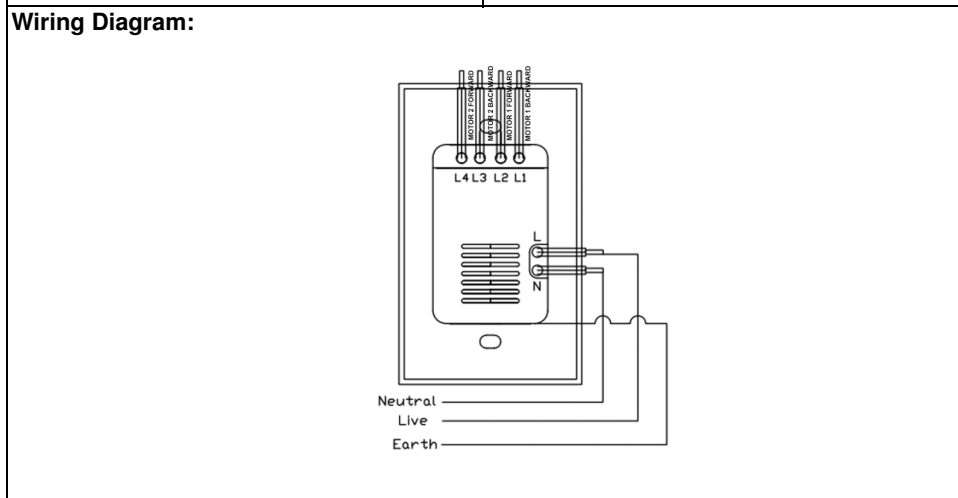

**Remarks:

1. The maximum load requirements for fluorescent, CFL and LED loads may vary depends on the specific fixture and /or bulb being used.
2. The Unit must be earthed

TECHNICAL INFORMATION AND PICTURES ARE SUBJECTED TO CHANGE WITHOUT PRIOR NOTICE.
Copyright © CityGrow Energy Systems Limited. All Rights Reserved.